




**PERFORMANCE CURVE**

**Models:**  
**HE3P6**  
**PE3P6**  
**SE3P / S3P**

**Back-Pull-Out Casing**  
**3-Blade Impeller**  
**3" Discharge**  
**6" Suction**

CURVE	POWER (HP/KW)	SPEED (RPM)	IMPELLER DIAMETER
A	60 / 45	2900	10.30" (262mm)
B	60 / 45	2900	10.00" (254mm)
C	50 / 37	2900	9.70" (246mm)
D	50 / 37	2900	9.50" (261mm)
E	50 / 37	2900	9.20" (234mm)
F	40 / 30	2900	9.00" (229mm)
G	40 / 30	2900	8.80" (223mm)
H	40 / 30	2900	8.50" (241mm)
I	30 / 22	2900	8.20" (208mm)
J	30 / 22	2900	8.00" (203mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.  
 CAPACITY (U.S. GALLONS PER MINUTE)

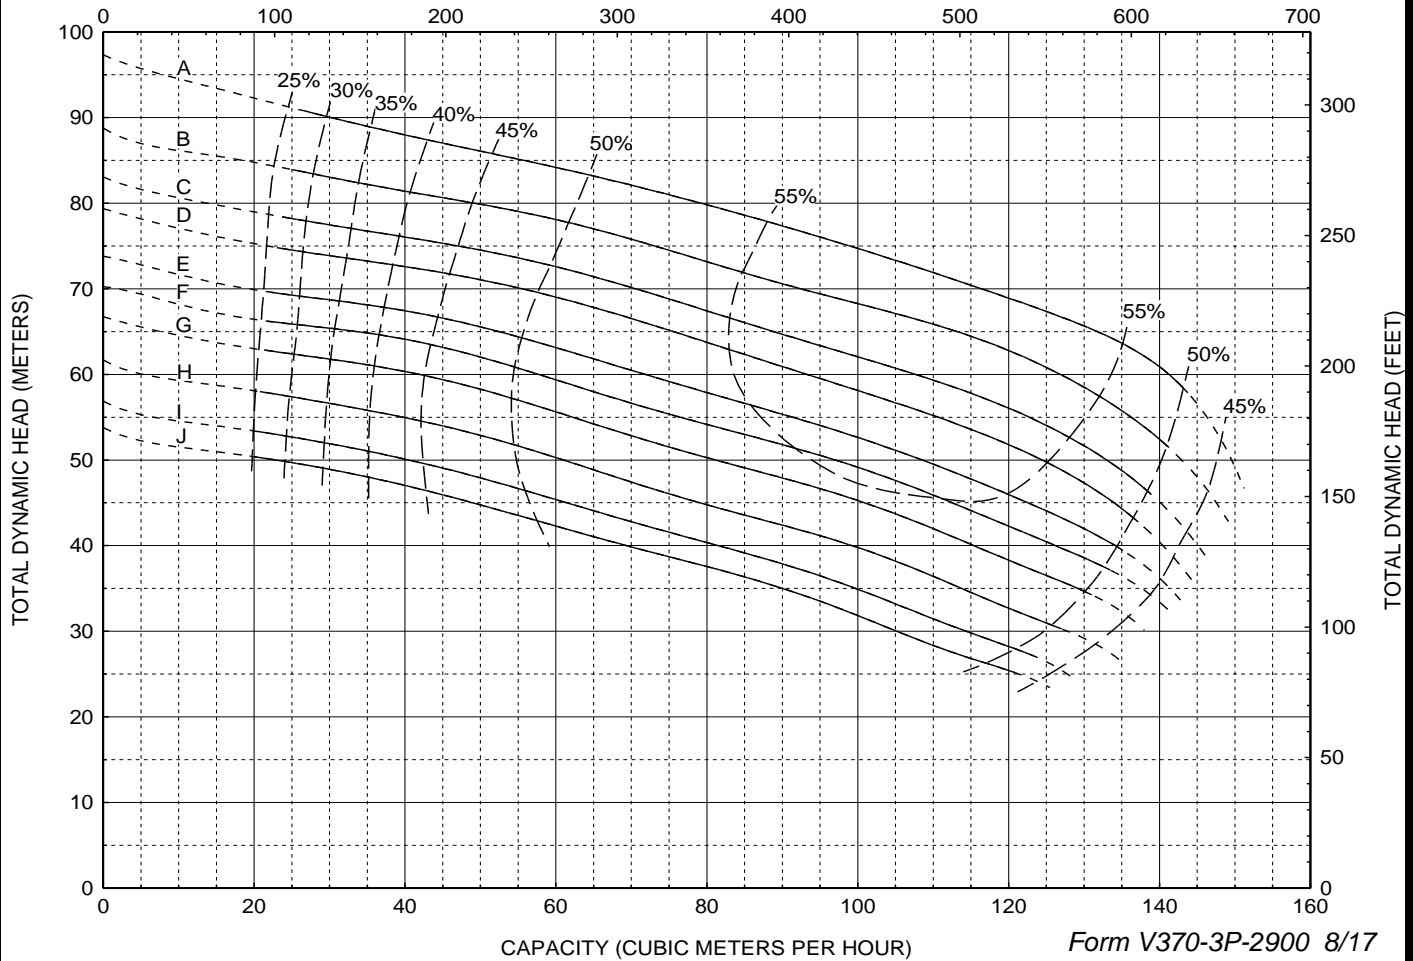

CAPACITY (CUBIC METERS PER HOUR)