



Vaughan®

Vaughan Self-Priming Chopper Pump PERFORMANCE CURVE

Model SP10R REPRIME LIFT


DIA. (IN)	LIFT (FT)
16.0"	22
15.7"	21
15.0"	19
14.3"	17
14.0"	17

CURVE	POWER (HP/KW)	SPEED (RPM)	IMPELLER DIAMETER
A	125 / 90	1185	16.00" (406 mm)
B	100 / 75	1185	15.70" (399 mm)
C	100 / 75	1185	15.00" (381 mm)
D	75 / 55	1185	14.30" (363 mm)
E	75 / 55	1185	14.00" (356 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVE. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B.

3-Blade Impeller
10" Discharge
12' Suction

CAPACITY (CUBIC METERS PER HOUR)

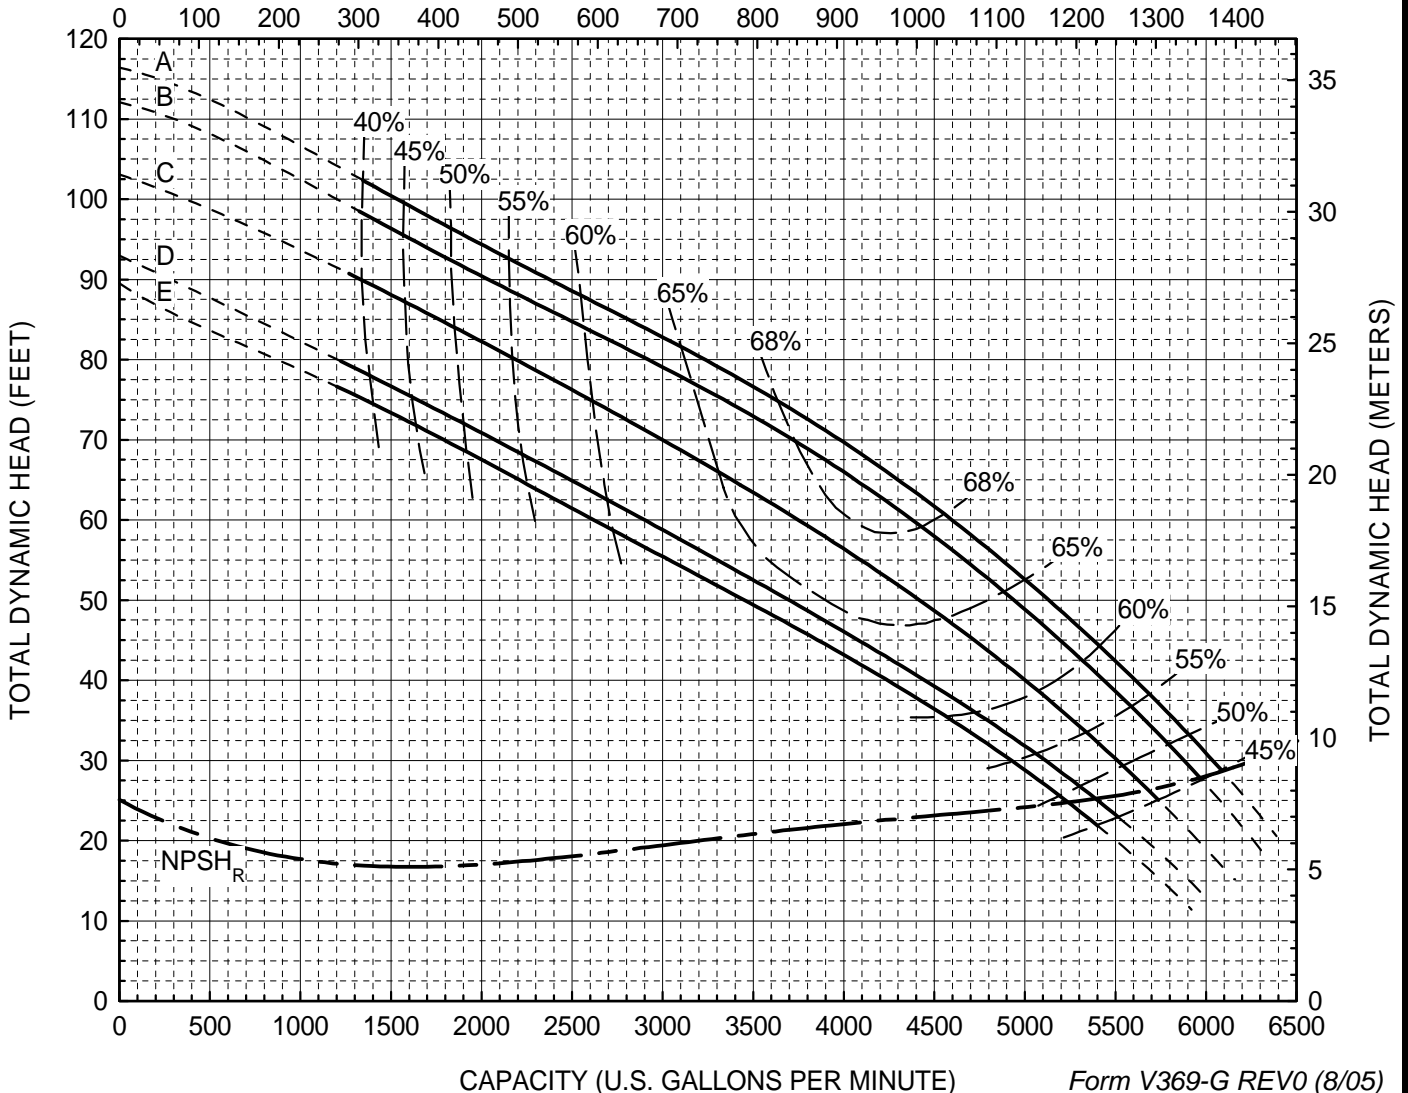

CAPACITY (U.S. GALLONS PER MINUTE)

Form V369-G REV0 (8/05)