




3"-6" S-SERIES SUBMERSIBLE CHOPPER PUMPS

Materials of Construction:

Impeller/Upper Cutter/Cutter Bar/Cutter Nut: Cast alloy steel, heat treated to minimum Rockwell C 60.
Casing/Bearing Housing/Guide Bracket/Elbow: Ductile cast iron.
Mechanical Seal: Cartridge type with silicon carbide (or tungsten carbide) seal faces and stainless steel sleeve.
Thrust Bearings: Back-to-back angular contact ball type or face to face tapered roller type.
Lubrication: ISO Grade 46 oil.
Flange: ANSI Class 125.
Paint: Ceramic Epoxy.

DRAWINGS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION PURPOSES. CONTACT VAUGHAN FOR CERTIFIED CONSTRUCTION PRINTS.

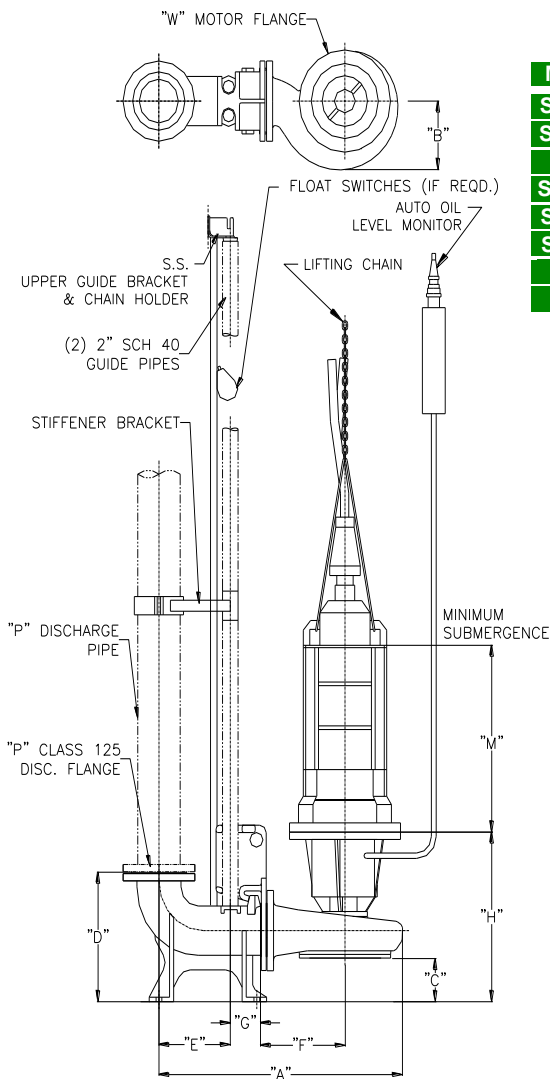

DIMENSIONS IN INCHES									
MODEL	A	B	C	D	E	F	G	H	P
S3F/S3G	27-5/8	5-7/8	4-7/8	15-3/4	9-7/16	8-1/2	4-9/16	21	3
S3L/S3M	29	6-1/2	5	15-3/4	9-7/16	9-1/2	4-9/16	20-1/2	3
S3P	33-3/4	7-11/16	5-11/16	15-3/4	9-7/16	11-7/8	4-9/16	20-7/8	3
S3V/S3W	28-5/8	6	5-5/8	15-3/4	9-7/16	9-1/2	4-9/16	21-1/8	3
S4K/S4L	31	7-1/2	4-5/8	15-3/4	9-13/16	10-3/8	4-9/16	21-1/4	4
S4S/S4T	34-5/8	9	4-5/8	15-3/4	9-13/16	12-3/8	4-9/16	21	4
S4V	42-7/16	10-11/16	4-3/8	15-3/4	9-13/16	17-7/8	4-9/16	21-7/16	4
S6U	36-3/4	9-5/8	6	17-7/8	11	13-1/8	4-9/16	23-1/4	6

15 MINUTE IN-AIR FRAME SIZES ONLY

HP	SPEED	FRAME	M	W	HP	SPEED	FRAME	M	W
5	1170	180TY	17-1/4	12 3/8	30	1170	320TY	25-1/2	18-3/4
	1750	180TY	17-1/4	12 3/8		1750	250TY	25	17
7.5	1170	210TY	21-7/8	15 1/4	40	3510	250TY	25	17
	1750	180TY	17-1/4	12 3/8		1170	320TY	25-1/2	18-3/4
10	1170	210TY	21-7/8	15 1/4	50	1750	250TY	25	17
	1750	210TY	21-7/8	15 1/4		3510	250TY	25	17
15	1170	250TY	25	17	60	1170	320TY	25-1/2	18-3/4
	1750	210TY	21-7/8	15 1/4		1750	320TY	25-1/2	18-3/4
20	3510	210TY	21-7/8	15 1/4	75	3510	320TY	25-1/2	18-3/4
	1170	250TY	25	17		1170	320TY	25-1/2	18-3/4
25	1750	210TY	21-7/8	15 1/4	100	1750	320TY	25-1/2	18-3/4
	3510	210TY	21-7/8	15 1/4		1750	360TY	32-3/8	20-1/4
	1170	250TY	25	17	125	1750	360TY	31-3/8	20-1/4



VAUGHAN CO., INC.
 364 Monte Elma Road, Montesano, WA 98563
 Phone: 1-360-249-4042 / Fax: 1-360-249-6155
 Toll Free Phone (US only): 1-888-249-CHOP (2467)
 Web Site: www.chopperpumps.com
 Company E-mail: info@chopperpumps.com

**MADE IN THE
USA**

For all current patents, see <http://www.chopperpumps.com/patents.htm>

SPECIFICATIONS: 3" – 6" S-SERIES SUBMERSIBLE CHOPPER PUMPS

The submersible chopper pump shall be specifically designed to pump waste solids at heavy consistencies without plugging or dewatering of the solids. Materials shall be chopped/macerated and conditioned by the pump as an integral part of the pumping action. The pump must have demonstrated the ability to chop through and pump high concentrations of solids such as plastics, heavy rags, grease and hair balls, wood, paper products and stringy materials without plugging, both in tests and field applications. Pump shall be manufactured by Vaughan Co., Inc.

DETAILS OF CONSTRUCTION

- A. Casing:** Shall be of volute design, spiraling outward to the Class 125 flanged centerline discharge. Casing shall be ductile cast iron with all water passages to be smooth, and free of blowholes and imperfections for good flow characteristics. Casing shall include a replaceable Rockwell C 60 alloy steel cutter to cut against the rotating impeller pump-out vanes for removing fiber and debris.
- B. Impeller:** Shall be semi-open type with pump out vanes to reduce seal area pressure. Chopping/maceration of materials shall be accomplished by the action of the cupped and sharpened leading edges of the impeller blades moving across the cutter bar at the intake openings, with a set clearance between the impeller and cutter bar of 0.015-0.025" cold. Impeller shall be cast alloy steel heat treated to minimum Rockwell C 60 and dynamically balanced. The impeller shall be keyed to the shaft and shall have no axial adjustments and no set screws.
- C. Cutter Bar Plate:** Shall be recessed into the pump casing and shall contain at least 2 shear bars extending diametrically across the intake opening to within 0.010-0.030" of the rotating cutter nut tooth, for the purpose of preventing intake opening blockage and wrapping of debris at the shaft area. Chopper pumps utilizing individually mounted shear bars shall not be acceptable. Cutter bar shall be alloy steel heat-treated to minimum Rockwell C 60.
- D. Cutter Nut:** The impeller shall be secured to the shaft using a cutter nut, designed to cut stringy materials and prevent binding using a raised, rotating cutter tooth. The cutter nut shall be cast alloy steel heat treated to minimum Rockwell C 60.
- E. Upper Cutter:** Shall be threaded into the casing or back pull-out adapter plate behind the impeller, designed to cut against the pump-out vanes and the impeller hub, reducing and removing stringy materials from the mechanical seal area. Upper cutter shall be cast alloy steel heat treated to minimum Rockwell C 60. The upper cutter teeth are positioned as closely as possible to the center of shaft rotation to minimize cutting torque and nuisance motor tripping. The ratio of upper cutter cutting diameter to shaft diameter in the upper cutter area of the pump shall be 3.0 or less.
- F. Pump Shafting:** Shafting shall be heat treated alloy steel, with a minimum diameter of 1.5 inches in order to minimize deflection during solids chopping.
- G. Bearing Housing:** Shall be ductile cast iron, and machined with piloted bearing fits for concentricity of all components. Piloted motor mount shall securely align motor on top of bearing housing.
- H. Thrust Bearings:** Shaft thrust in both directions shall be taken up by two back-to-back mounted single-row angular contact ball bearings, or a matched set of face to face tapered roller bearings, with a minimum L-10 rated life of 100,000 hours. Overhang from the centerline of the lower thrust bearing to the seal faces shall be a maximum of 1.7". A third mechanical seal (two in motor) shall also be provided to isolate the bearings from the pumped media. The third seal, as well as the thrust bearings shall be oil bath lubricated in the bearing housing by ISO Grade 46 oil. Shaft overhang exceeding 1.7 inches from the center of the lowest thrust bearing to the seal faces shall be considered unacceptable.
- I. Pump Mechanical Seal:** The mechanical seal shall be located immediately behind the impeller hub to maximize the flushing available from the impeller pump-out vanes. The seal shall be a cartridge-type mechanical seal with Viton O-rings and silicon carbide (or tungsten carbide) faces. This cartridge seal shall be pre-assembled and pre-tested so that no seal settings or adjustments are required from the installer. Any springs used to push the seal faces together must be shielded from the fluid to be pumped. The cartridge shall also include a 17-4PH, heat-treated seal sleeve and a ductile cast iron seal gland.
- J. Automatic Oil Level Monitor:** An oil level switch shall be mounted at the top of the wet well, with a hose feeding down to the side of the bearing housing to monitor oil level and shut off the motor in event of low oil level. A relay shall be included for mounting in the motor control panel.
- K. Shaft Coupling:** The submersible motor shall be close coupled directly to the pump shaft using a solid sleeve coupling, which is keyed to both the pump and motor shafts. Slip clutches and shear pins between the shaft and the motor are considered unacceptable.
- L. Stainless Steel Nameplate:** Shall be attached to the pump giving the manufacturer's model and serial number, rated capacity, head, speed and all pertinent data.
- M. Submersible Motor:** The submersible motor shall be U/L or FM listed and suitable for Class I, Group C & D, Division I hazardous locations, rated at ___ HP, ___ RPM, ___ Volts, 60 Hertz and 3 phase, 1.15 service factor (1.0 for Continuous In-Air) with Class F insulation. Motor shall have tandem mechanical seals in oil bath and dual moisture sensing probes. Moisture probes must be connected to indicate water intrusion. The lower motor seal shall be exposed only to the lubricant in the pump bearing housing, with no exposure to the pumped media. Motor shall include two normally closed automatic resetting thermostats connected in series and embedded in adjoining phases. The thermostats must be connected per local, state, and/or the National Electric Code to maintain hazardous location rating and to disable motor starter if overheating occurs. Motor frame shall be cast iron, and all external hardware and shaft shall be stainless steel. Motor shall be sized for non-overloading conditions.
- N. Guide Rail System:** Provide a guide rail system consisting of two galvanized or stainless steel guide rails (by others), cast ductile iron pump guide bracket, cast ductile discharge elbow with mounting feet and Class 125 flanges, 316 stainless steel upper guide rail mounting bracket, and 316 stainless steel intermediate guide rail stiffener bracket every 10 feet.
- O. Optional Spark Proof Guide Rail System:** Provide a non-sparking guide rail system consisting of two galvanized or stainless steel guide rails (by others), cast bronze pump guide bracket, cast ductile iron discharge elbow with mounting feet and Class 125 flanges, 316 stainless steel upper guide rail mounting bracket, and 316 stainless steel intermediate guide rail stiffener bracket every 10 feet. System design shall prevent spark ignition of explosive gases during pump installation and removal.
- P. Surface Preparation:** Solvent wash and a single coat of Tnemec 431 epoxy applied at 5 MDFT minimum (except motor).
- Q. OPTIONAL Surface Preparation:** SSPC-SP6 commercial sandblast (except motor), a prime coat of Tnemec 431 epoxy and a finish coat of Tnemec 431 epoxy for total finish of 30 MDFT minimum (except motor).