



Vaughan E Series 50 Hz Chopper Pump PERFORMANCE CURVE


Models:
HE6W8
PE6W8
SE6W

Back-Pull-Out Casing
4-Blade Impeller
6" ANSI Discharge
8" ANSI Suction

CURVE	POWER (KW)	SPEED (RPM)	IMPELLER DIAMETER
A	11	970	11.80" (300 mm)
B	11	970	11.50" (292 mm)
C	11	970	11.30" (287 mm)
D	7.5	970	10.90" (277 mm)
E	7.5	970	10.50" (267 mm)
F	5.5	970	10.00" (254 mm)
G	5.5	970	9.40" (239 mm)
H	5.5	970	9.20" (234 mm)
I	4	970	8.80" (224 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B.

CAPACITY (U.S. GALLONS PER MINUTE)

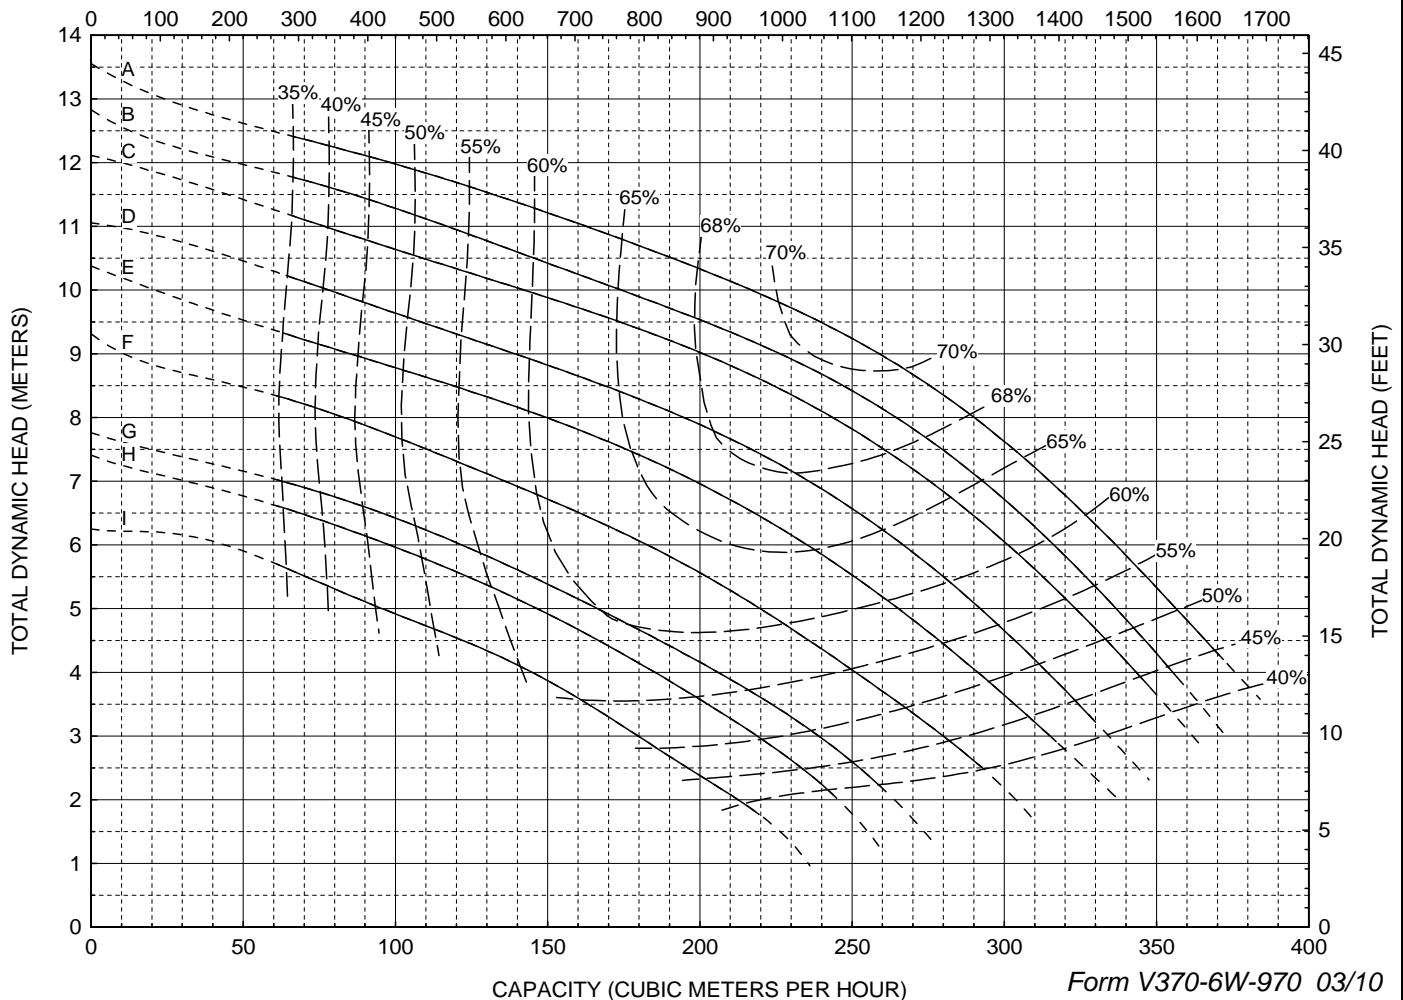

CAPACITY (CUBIC METERS PER HOUR)

Form V370-6W-970 03/10