



# Vaughan

## Vaughan E Series Chopper Pump PERFORMANCE CURVE

**Models:**

**C3L(max. 3' long)**


**V3L**

**3-Blade Impeller  
3" Discharge  
Variable Speed Curve**

CURVE	POWER (HP/KW)	SPEED (RPM)	IMPELLER DIAMETER
A	30 / 22	2900	8.00" (203mm)
B	25 / 18.5	2700	8.00" (203mm)
C	20 / 15	2500	8.00" (203mm)
D	15 / 11	2250	8.00" (203mm)
E	10 / 7.5	1900	8.00" (203mm)
F	7.5 / 5.5	1765	8.00" (203mm)
G	7.5 / 5.5	1600	8.00" (203mm)
H	5 / 4	1460	8.00" (203mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B.

CAPACITY (CUBIC METERS PER HOUR)

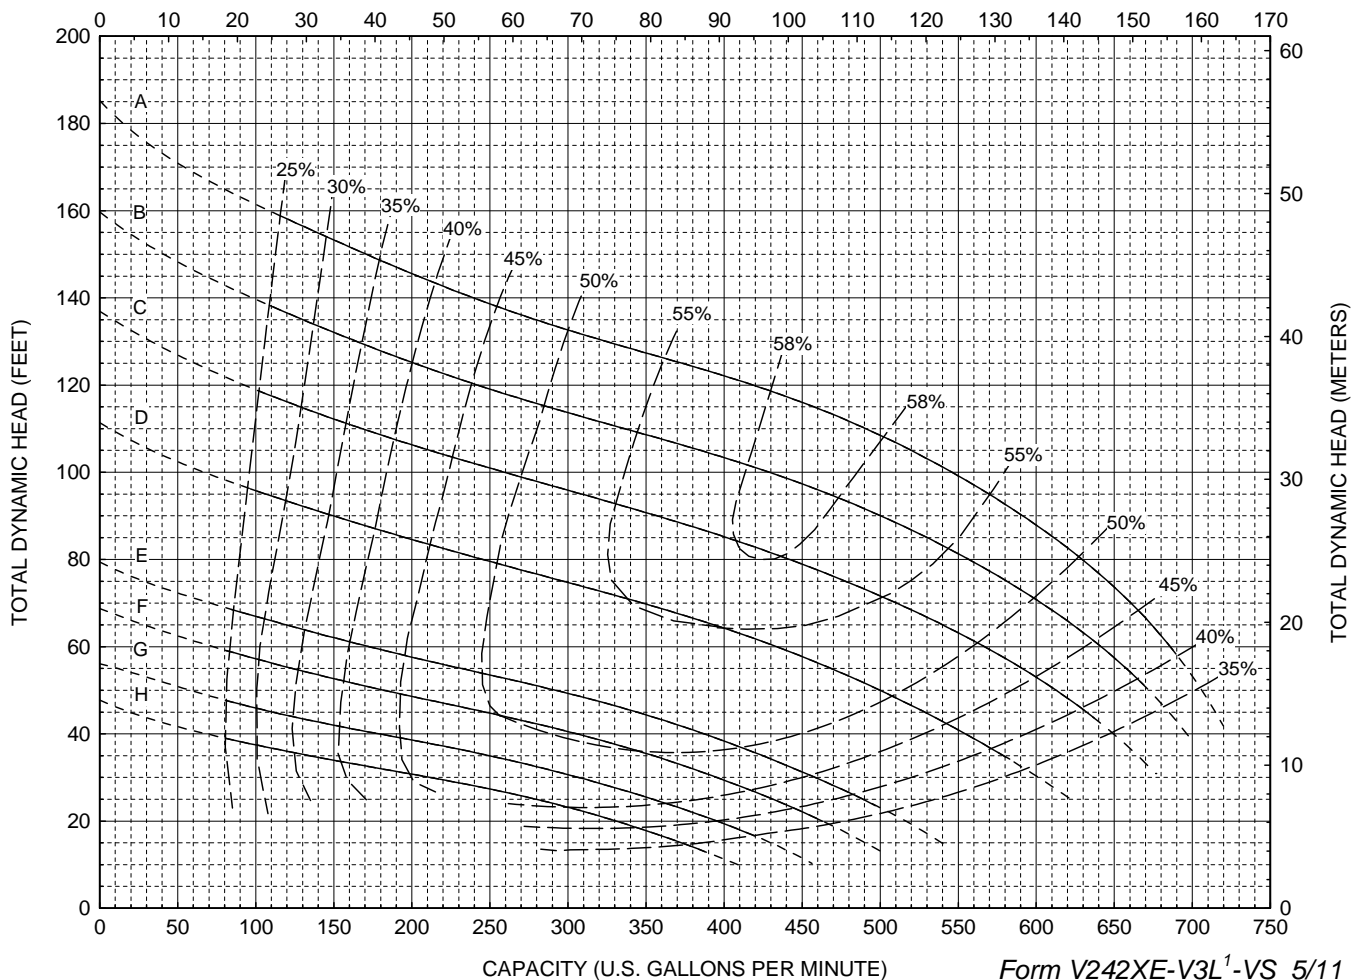

Form V242XE-V3L<sup>1</sup>-VS 5/11