


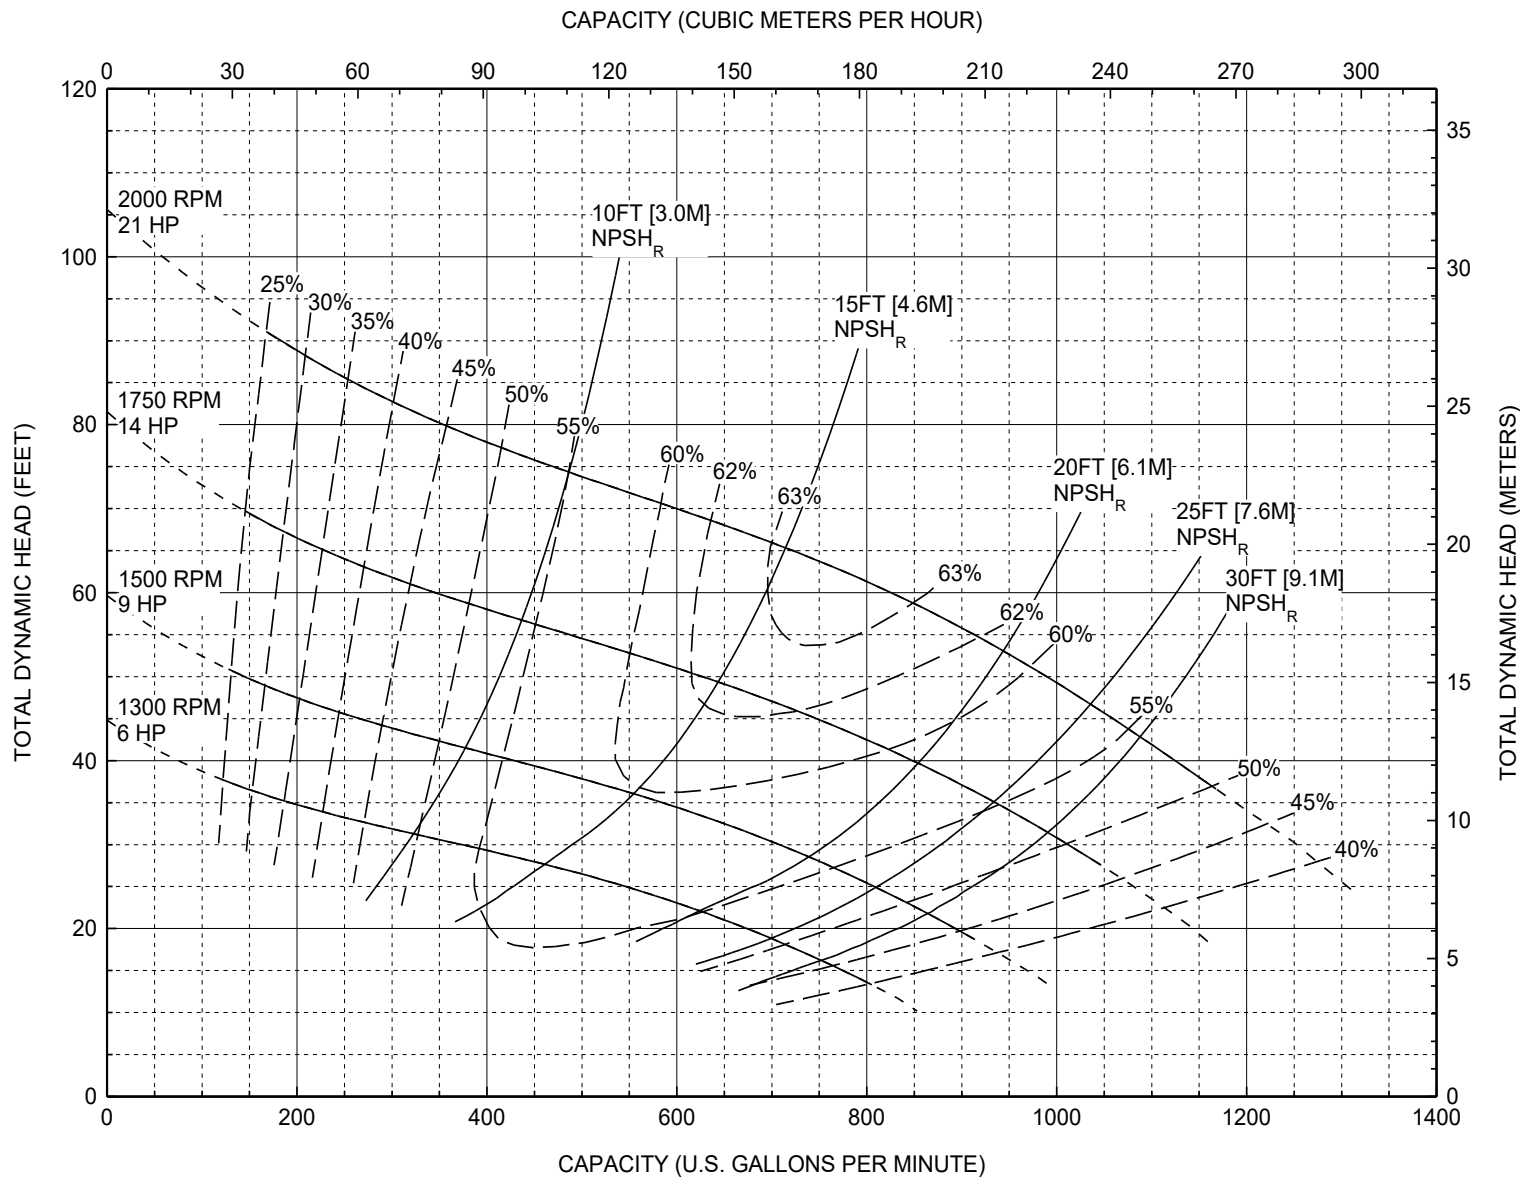

**Model:**  
**Portable**  
**THES4K6**

**Back-Pull-Out Casing**  
**2-Blade Impeller**  
**8.90" Diameter**  
**4" Discharge**  
**6" Suction**

**Full Trim Variable**  
**Speed Curve**

**21 continuous HP**  
**req'd at 2000 RPM**

**Minimum continuous**  
**engine speed of**  
**1500rpm required**

Visit us on the web at:  
[www.chopperpumps.com](http://www.chopperpumps.com)

*Unmatched Reliability*  
**Vaughan®**

 **Chopper**  
**PERFORMANCE CURVE**

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.

Form V844 THES4K6-VS-089 12/25 Rev 2