


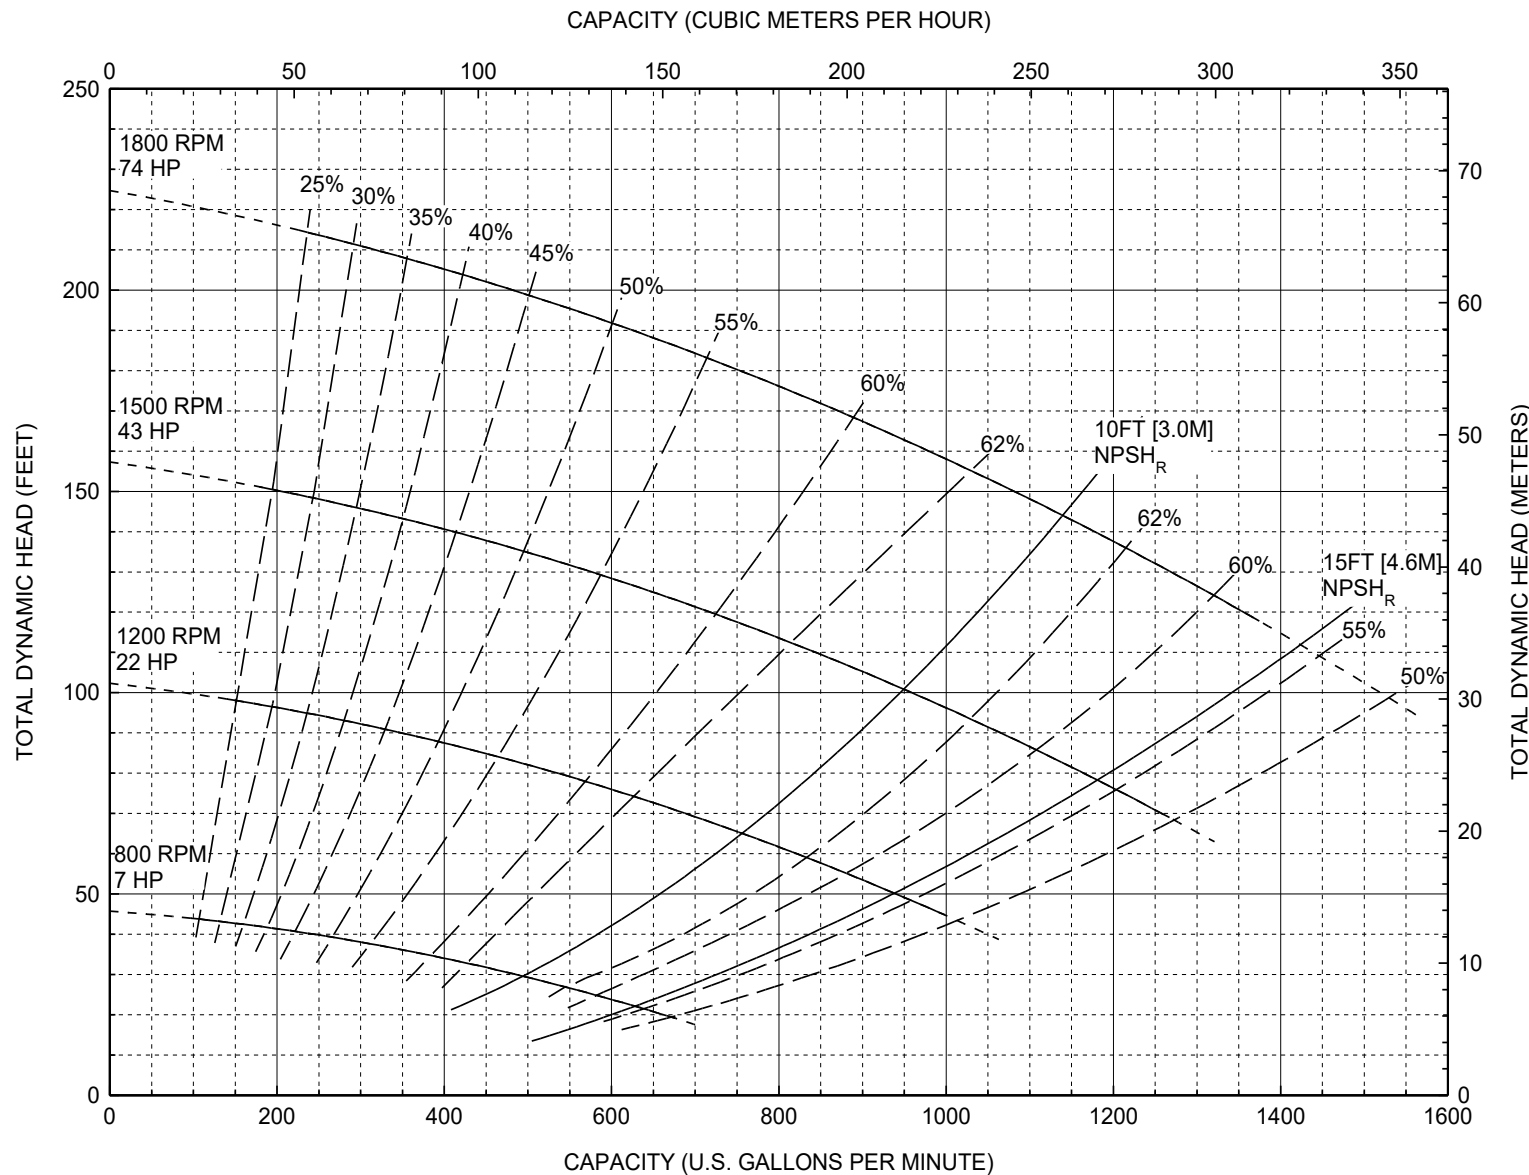

Model:
Portable
THES4V8

Back-Pull-Out Casing
4-Blade Impeller
13.50" Diameter
4" Discharge
8" Suction

Trimmed Variable
Speed Curve

74 continuous HP
req'd at 1800 RPM

Minimum continuous
engine speed of
1500rpm required

Visit us on the web at:
www.chopperpumps.com

Unmatched Reliability
Vaughan®

 **Chopper**
PERFORMANCE CURVE

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.

Form V848 THES4V8-VS-135 12/25 Rev 0