


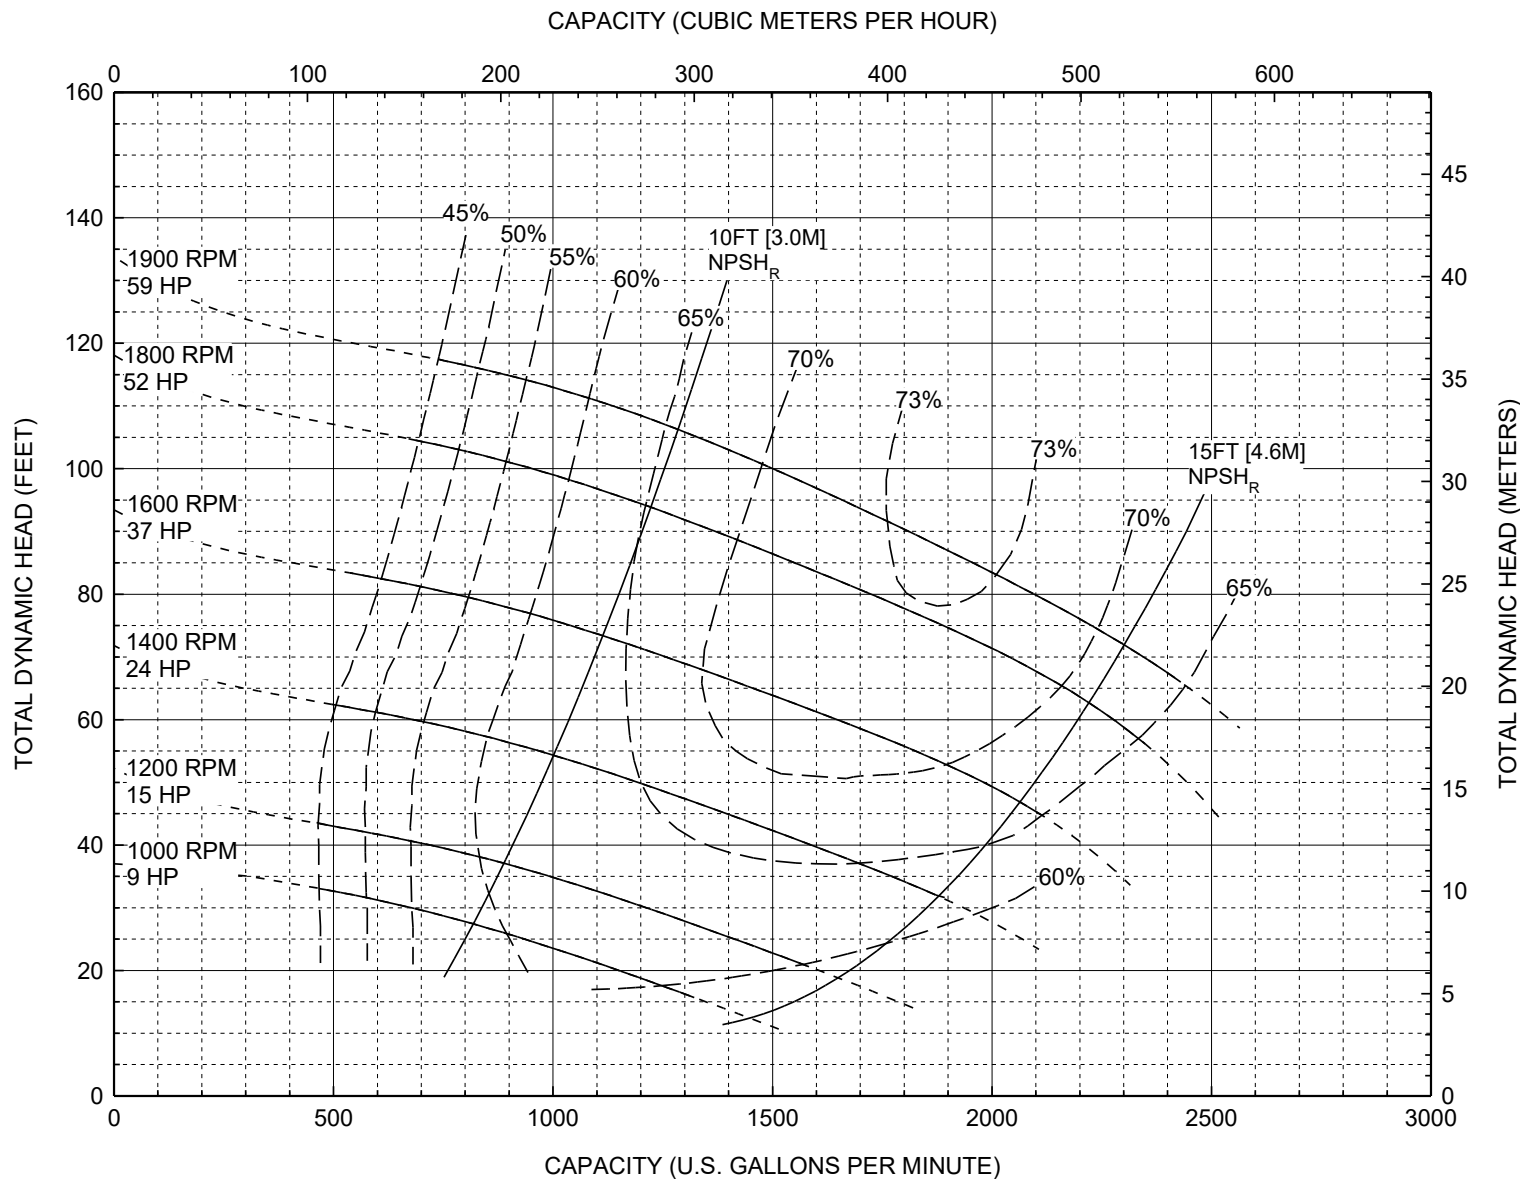

Model:
Portable
THES6W8

Back-Pull-Out Casing
4-Blade Impeller
10.50" Diameter
6" Discharge
8" Suction

Trimmed Variable
Speed Curve

59 continuous HP
req'd at 1900 RPM

Minimum continuous
engine speed of
1500rpm required

Visit us on the web at:
www.chopperpumps.com

Unmatched Reliability
Vaughan®

 **Chopper**
PERFORMANCE CURVE

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.

Form V845 THES6W8-VS-105 12/25 Rev 2