


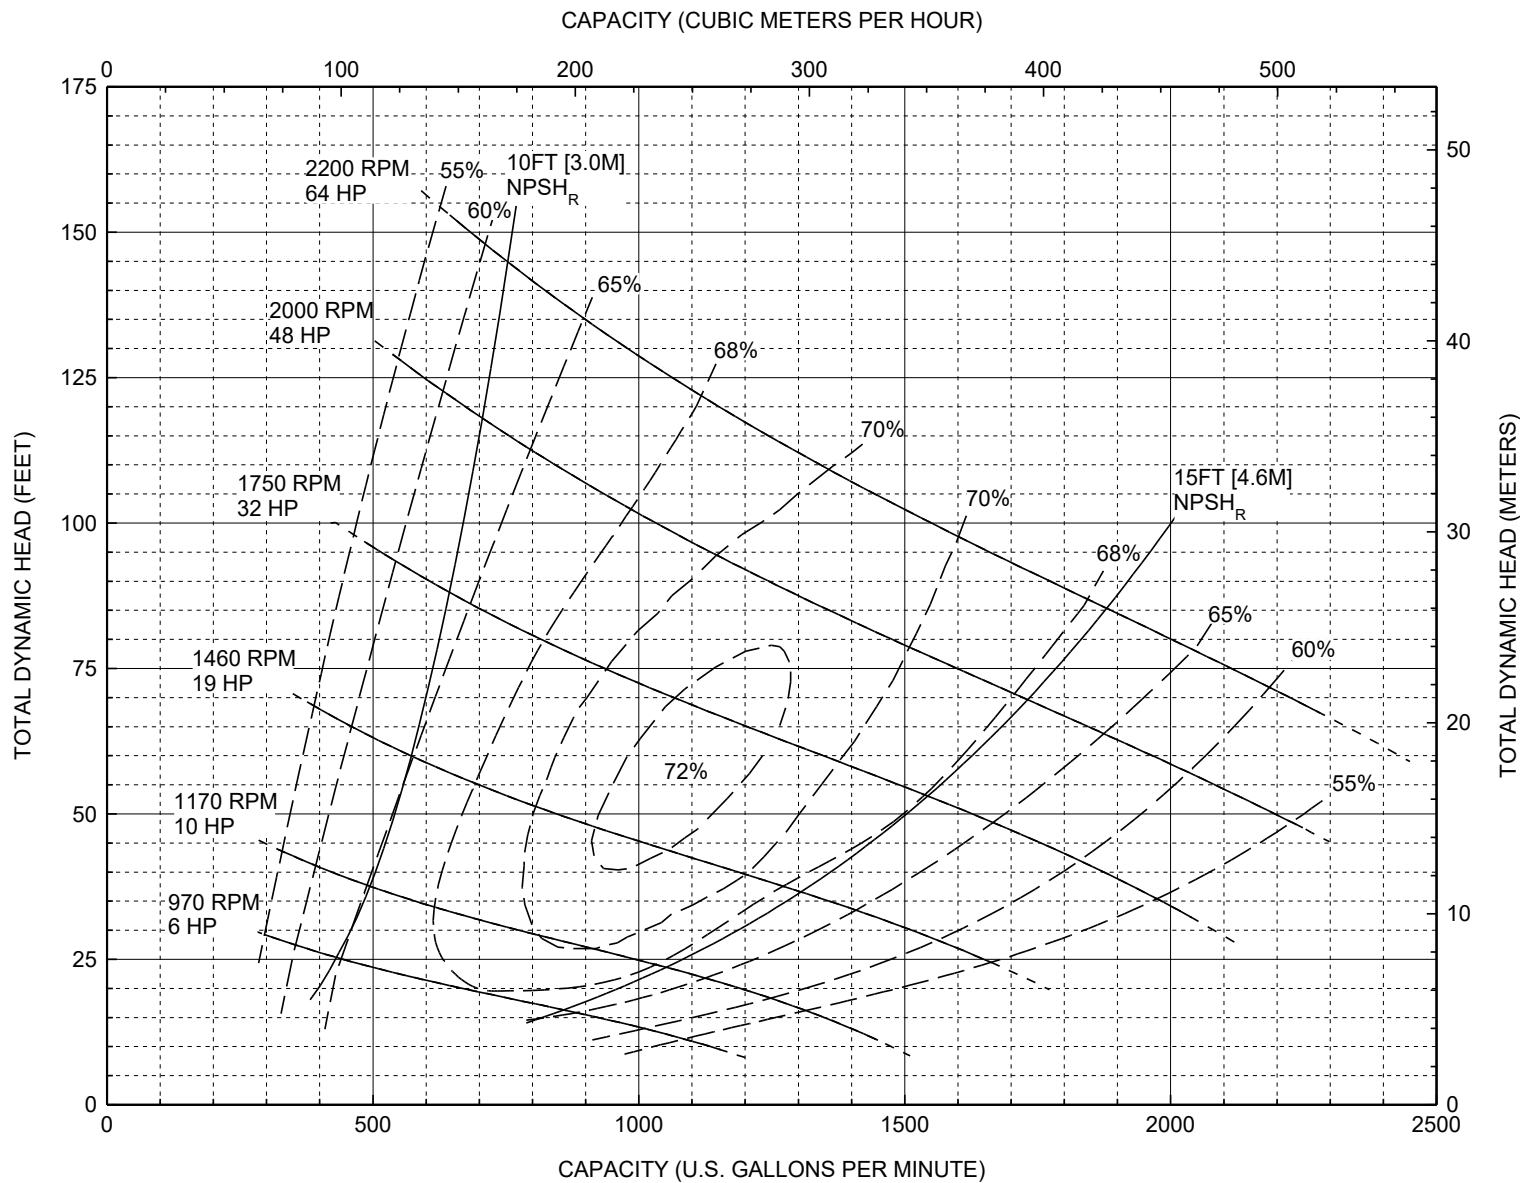

Model:
Portable
THSCS6ES

Back-Pull-Out Casing
11" Impeller
5"/6" Diameter
6" Suction
Max 4" Sphere

Full Trim Variable
Speed Curve

64 continuous HP
req'd at 2200 RPM

Minimum continuous
engine speed of
1500rpm required

Visit us on the web at:
www.chopperpumps.com

Unmatched Reliability
Vaughan®

 **Chopper**
PERFORMANCE CURVE

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.

Form V894 THSCS6ES-VS-110 12/25 Rev 0