


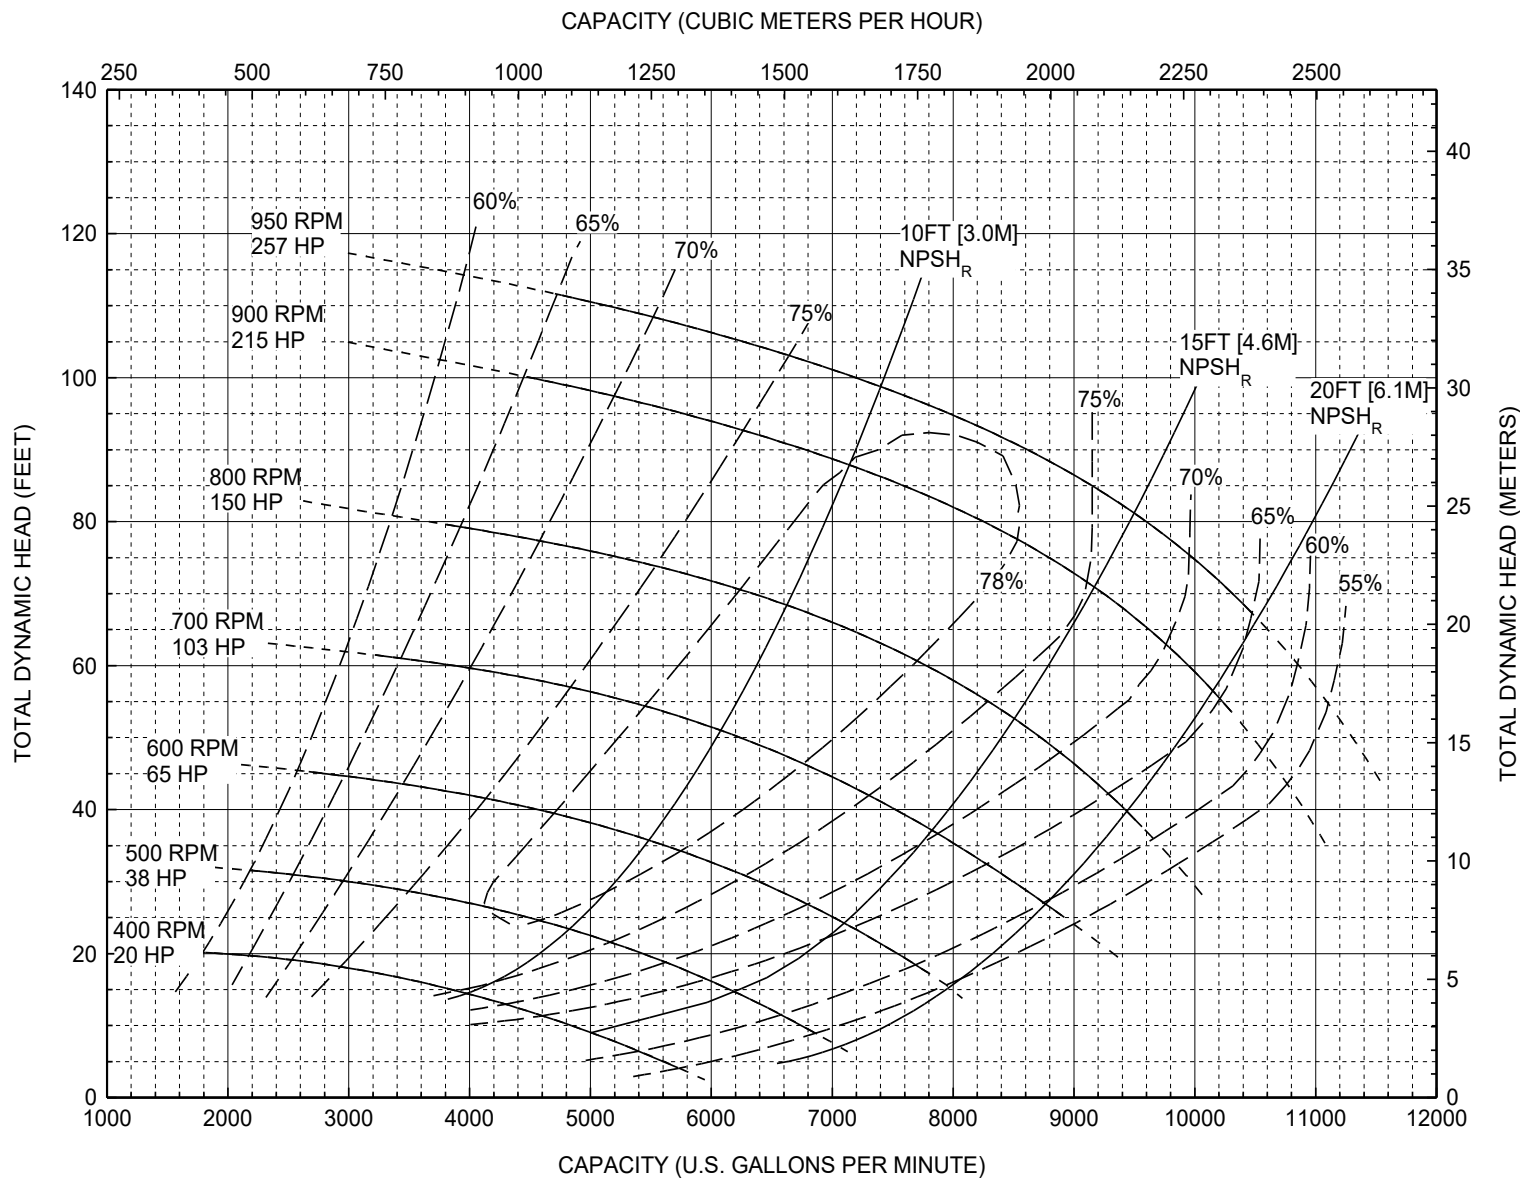

Model:
Portable
THES12W14

Back-Pull-Out Casing
5-Blade Impeller
21.00" Diameter
12" Discharge
14" Suction

Full Trim Variable
Speed Curve

257 continuous HP
req'd at 950 RPM

Minimum continuous
engine speed of
1500rpm required

Visit us on the web at:
www.chopperpumps.com

Unmatched Reliability
Vaughan®

 **Chopper**
PERFORMANCE CURVE

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.

Form V855 THES12W14-VS-210 12/25 Rev 1