


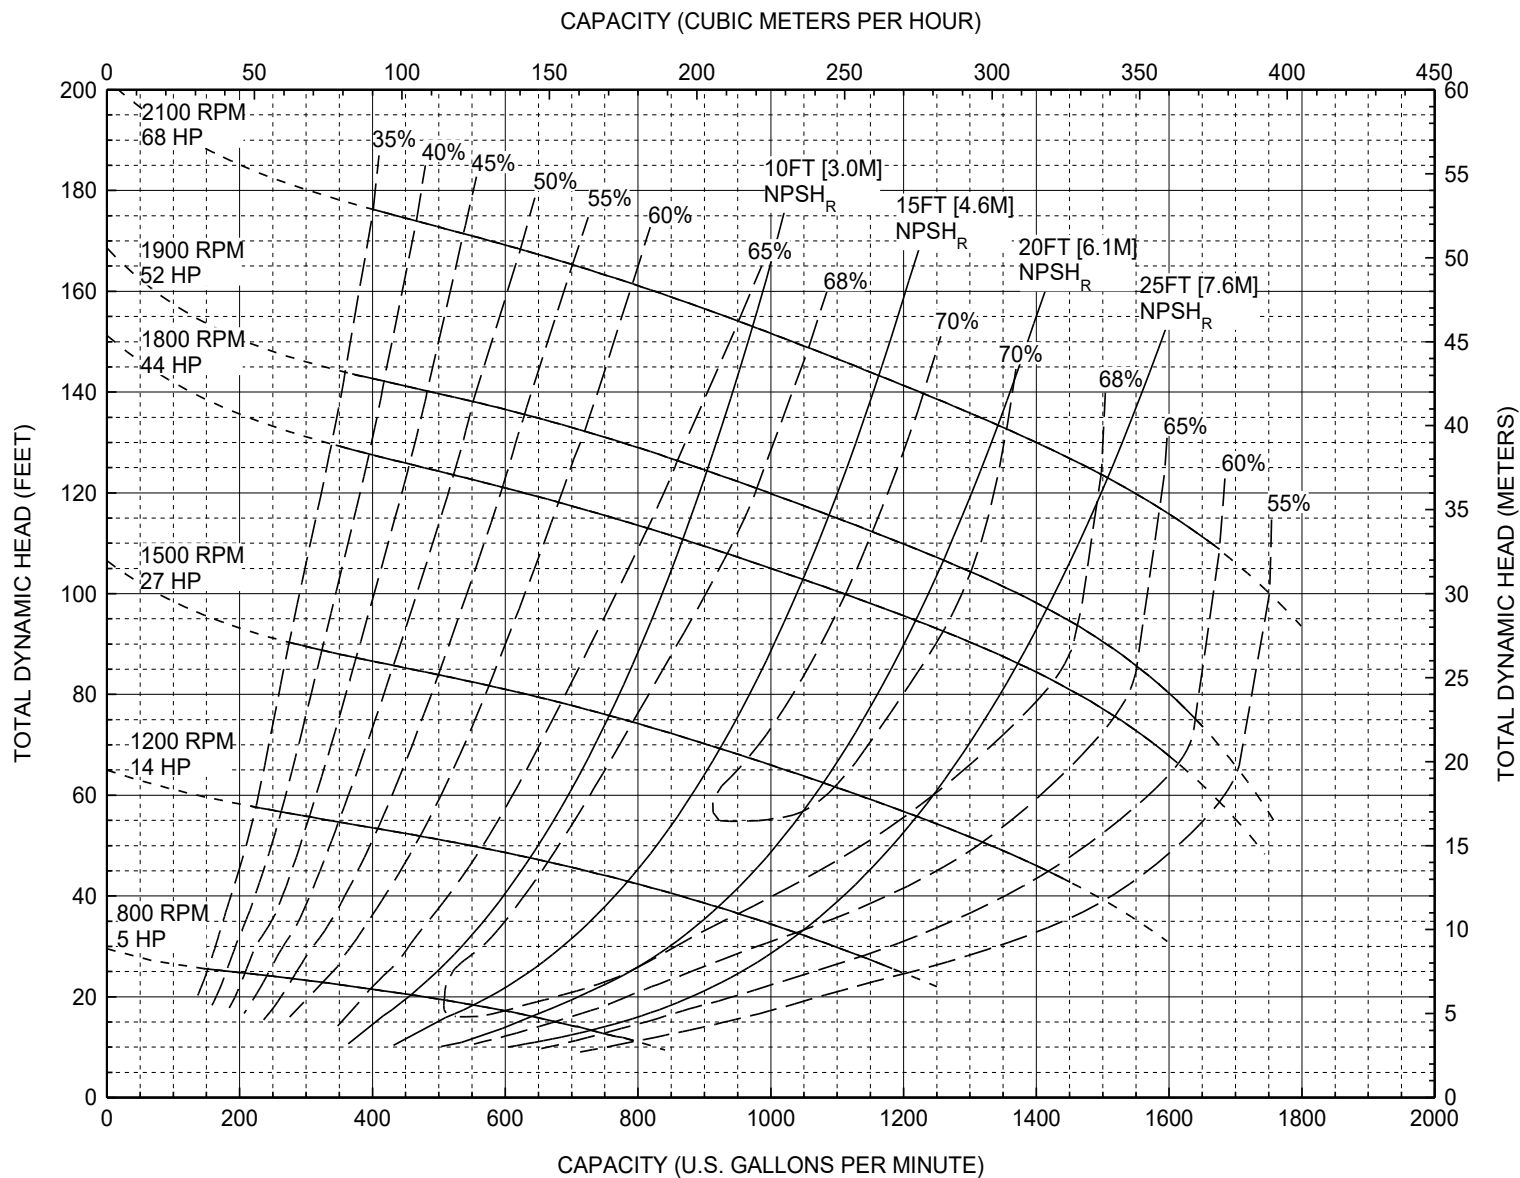

Model:
Portable
THES4S6

Back-Pull-Out Casing
3-Blade Impeller
11.80" Diameter
4" Discharge
6" Suction

Full Trim Variable
Speed Curve

68 continuous HP
req'd at 2100 RPM

Minimum continuous
engine speed of
1500rpm required

Visit us on the web at:
www.chopperpumps.com

Unmatched Reliability
Vaughan

 **Chopper**
PERFORMANCE CURVE

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.

Form V843 THES4S6-VS-118 12/25 Rev 2