


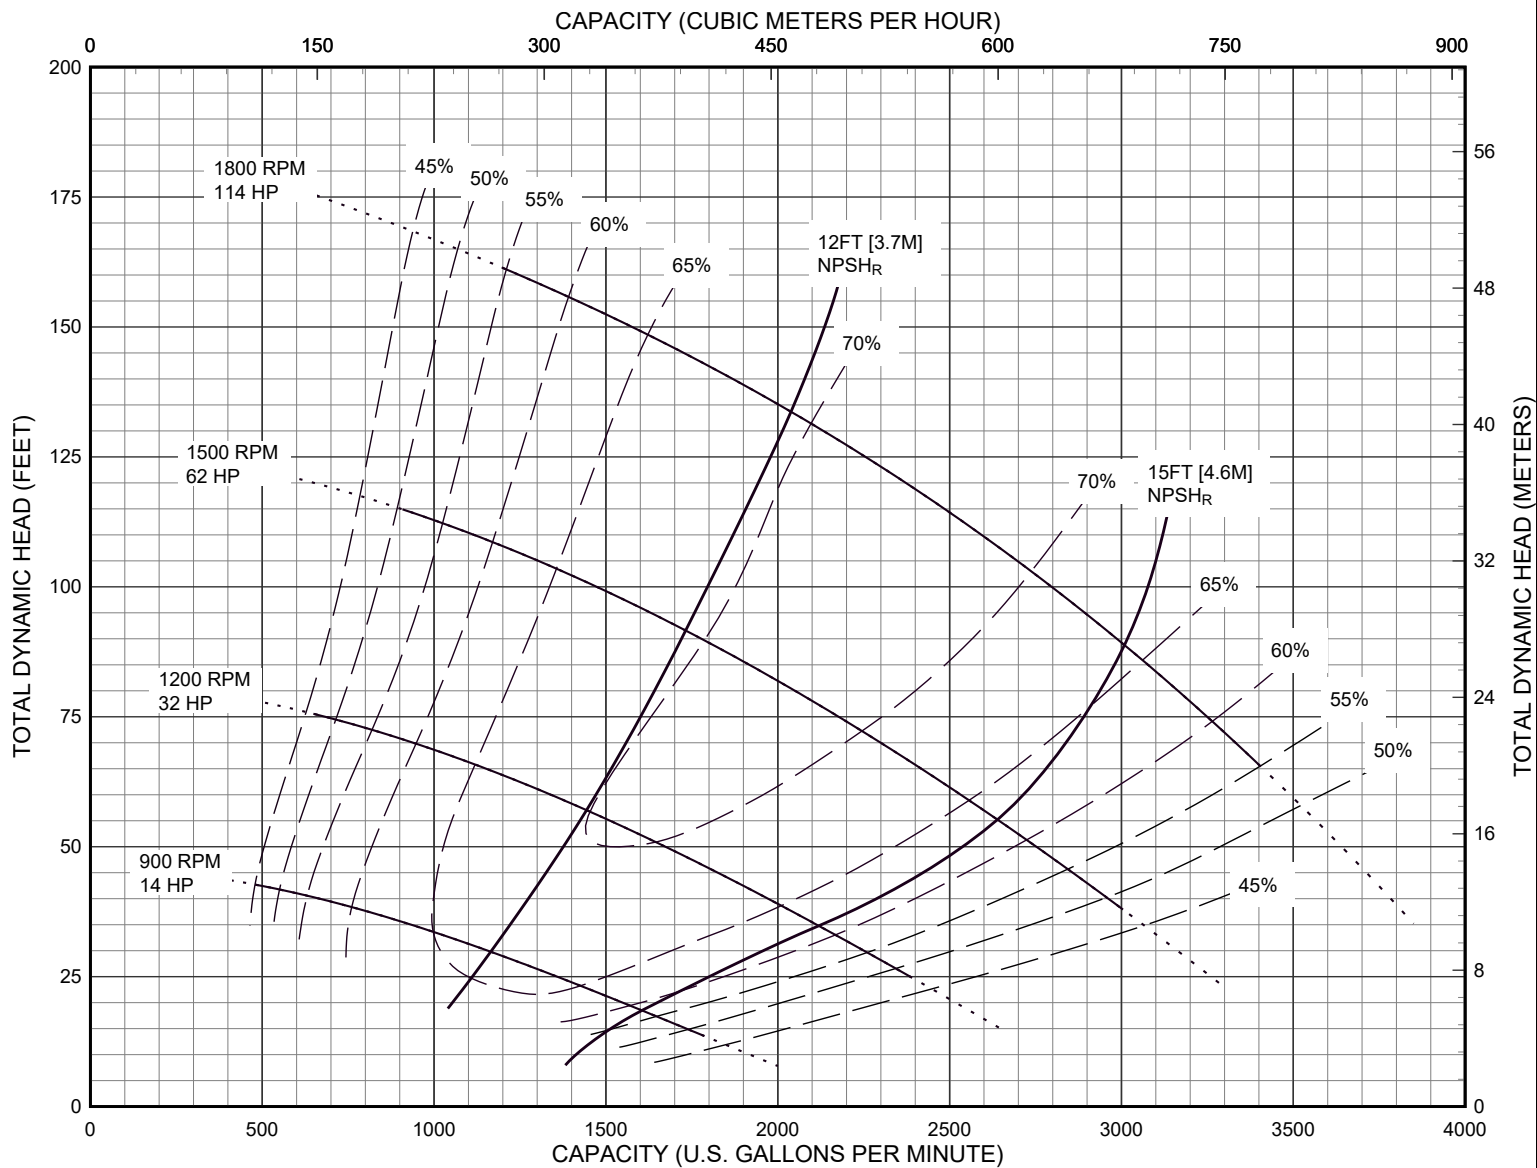

Model:
Portable
THES8L10

Back-Pull-Out Casing
3-Blade Impeller
12.80" Diameter
8" Discharge
10" Suction

Trimmed Variable
Speed Curve

114 continuous HP
req'd at 1800 RPM

Minimum continuous
engine speed of 1500
RPM required

Visit us on the web at:
www.chopperpumps.com

Unmatched Reliability
Vaughan®

 **Chopper**
PERFORMANCE CURVE

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.

Form V850 THES8L10-VS-128 12/25 Rev 1