




STV8N STAINLESS STEEL VERTICAL WET WELL CHOPPER PUMP

Materials of Construction:

Casing/Backplate:	CD4MCu stainless steel.
Impeller/Upper Cutter/External Cutter:	CD4MCu stainless steel.
Cutter Bar/Wearplate:	CD4MCu stainless steel.
Mechanical Seal:	Cartridge type with silicon carbide (or tungsten carbide) faces and stainless steel sleeve.
Thrust Bearings:	Angular contact ball bearings.
Radial Bearings:	Ball bearing.
Stub Shaft/ Extension Shaft:	316 Stainless steel / Heat treated alloy steel.
Lubrication:	ISO 46 hydraulic oil.
Discharge Flange:	8" ANSI Class 150.
Mounting Plate:	Carbon steel.
Paint:	Epoxy.

DRAWINGS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION PURPOSES. CONTACT VAUGHAN FOR CERTIFIED CONSTRUCTION PRINTS.

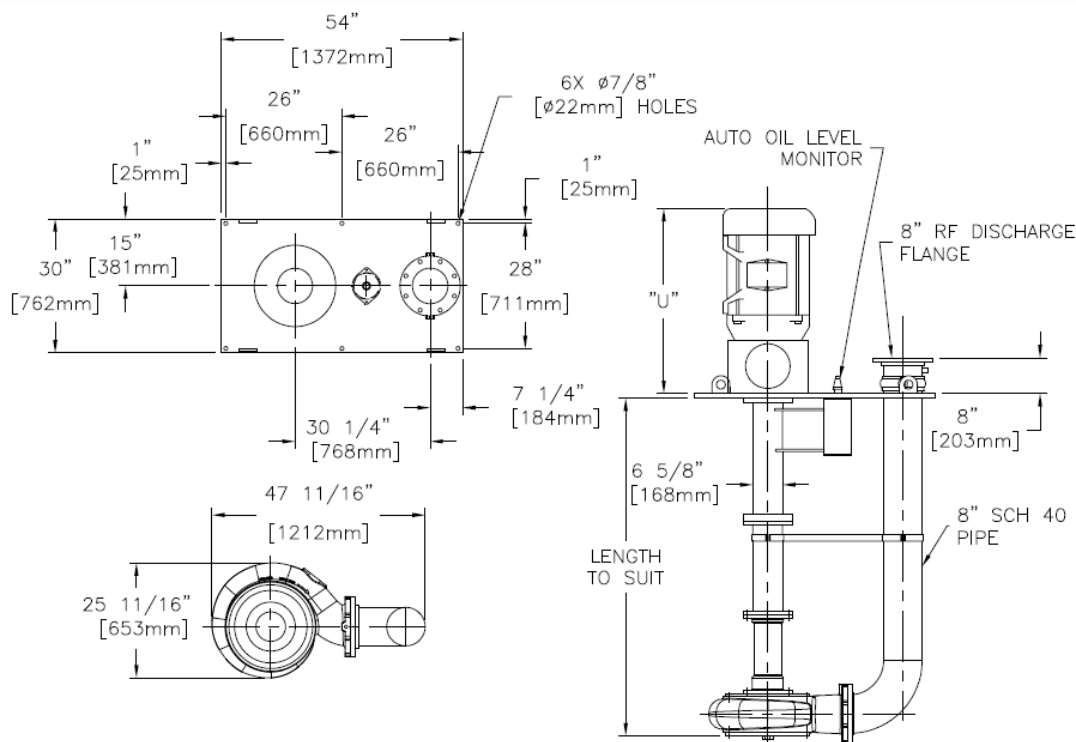

(1:2 SCALE) MODEL: V8N SPEC SHEET DWG. #120220 REV. 0 1/10/19

IEC Frame	*U
200L	995 mm
250S	1157 mm
250M	1192 mm
280S	1292 mm
280M	1342 mm
315S	1407 mm
315M	1457 mm

*FOR REFERENCE ONLY. DIMENSION WILL VARY BY MOTOR MANUFACTURER.

NEMA Frame	*U
286TC	32.70"
324TC	34.25"
326TC	35.75"
364TC	39.45"
365TC	39.45"
404TC	48.20"
405TC	48.20"
444TC	54.00"



VAUGHAN CO., INC.
 364 Monte Elma Road, Montesano, WA 98563
 Phone: 1-360-249-4042 / Fax: 1-360-249-6155
 Toll Free Phone (US only): 1-888-249-CHOP (2467)
 Website: www.chopperpumps.com
 Company E-mail: info@chopperpumps.com

For all current patents, see <https://www.chopperpumps.com/patents/>

**MADE IN THE
USA**

SPECIFICATION: STV8N STAINLESS STEEL VERTICAL WET WELL CHOPPER PUMP

The vertical wet well chopper pump shall be specifically designed to pump waste solids at heavy consistencies. Materials shall be chopped and conditioned by the pump as an integral part of the pumping action. The pump must have demonstrated the ability to chop through and pump high concentrations of solids such as plastics, heavy rags, grease and hair balls, wood, paper products and stringy materials without plugging, both in tests and field applications.

DETAILS OF CONSTRUCTION

- A. Casing, Backplate and Wear Plate:** The pump casing shall be of volute design, spiraling outward to the flanged centerline discharge. A 1/4" NPT pressure tap shall be included on or near the discharge flange. Backplate shall allow removal of pump components from outboard of the casing, and allow external adjustment of impeller-to-cutter bar clearance. Casing and backplate shall be CD4MCu stainless steel with all water passages to be smooth, and free of blowholes and imperfections for good flow characteristics. Backplate will include a replaceable CD4MCu stainless steel wear plate with internal cutter groove, and adjustability to maintain 0.030-0.050" (0.75–1.25 mm) clearance to cut against the rotating impeller pump-out vanes for removing fiber and debris.
- B. Impeller:** Shall be a three blade semi-open type with pump out vanes to reduce seal area pressure. Chopping of materials shall be accomplished by the action of the cupped and sharpened leading edges of the impeller blades moving across the stationary cutter bar at the intake openings, with a maximum set clearance between the impeller and cutter bar of 0.015-0.025" (0.40–0.65 mm) cold. Impeller shall be CD4MCu stainless steel and dynamically balanced. The impeller shall be threaded to the shaft and shall have no axial adjustments and no set screws.
- C. Cutter Bar:** Shall be recessed into the pump bowl and contain at least 2 shear bars extending diametrically across the intake opening to within 0.025" - 0.050" (0.65–1.25 mm) of the rotating external cutter tooth, for the purpose of preventing debris from wrapping and blocking the intake opening. Cutter bar shall be CD4MCu stainless steel. Chopper pumps utilizing individually mounted shear bars, and which do not have a rotating external cutter extending through to the opposite side of the shear bar, shall not be acceptable.
- D. Upper Cutter:** Shall be threaded into the wear plate behind the impeller, designed to cut against the pump-out vanes and the impeller hub, reducing and removing stringy materials from the mechanical seal area. Upper cutter shall be CD4MCu stainless steel. The upper cutter teeth are positioned as closely as possible to the center of shaft rotation to minimize cutting torque and nuisance motor tripping. The ratio of upper cutter cutting diameter to shaft diameter in the upper cutter area of the pump shall be 3.6 or less.
- E. External Cutter:** The external cutter shall be used to eliminate binding or build-up of stringy materials at the pump inlet. The external cutter shall consist of opposing cutter wings which shear against the outside surface of the shear bars and the anvil, an integral cast tooth which shears against the adjacent surface of the shear bars, and a hex head sufficiently sized for ease of removal. The external cutter shall be CD4MCu stainless steel.
- F. Pump Shafting:** Shall be 2-7/16" diameter minimum. Lower stub shaft shall be 316 stainless steel. Upper shaft extension shall be turned, ground and polished. The shaft column shall be schedule 40 minimum 6" 316 stainless steel pipe welded to 316 stainless steel flanges and machined with piloted bearing fits for concentricity of all components. All support column tubes shall be leak tested. Distance between shaft bearings shall not exceed critical speed dimensions.
- G. Pump Shaft Bearings:** Shall be oil bath lubricated by ISO 46 hydraulic oil, with the exception of the top bearing, which shall be grease packed. The bearings shall have a minimum L-10 life rated 100,000 hours. Shaft thrust shall be taken up by two back-to-back mounted single row angular contact ball bearings, or tapered roller bearings which bear against a machined shoulder on one side and the seal sleeve on the other side. Overhang from the centerline of the lower thrust bearing to the seal faces shall be a maximum of 2.75", with a mechanical seal to isolate the bearings from the pumped media.
- H. Pump Mechanical Seal:** The mechanical seal shall be located immediately behind the impeller hub to maximize the flushing available from the impeller pumpout vanes. The seal shall be a screw-in, cartridge-type mechanical seal with Viton O-rings and silicon carbide (or tungsten carbide) faces. This cartridge seal shall be a pre-assembled, pre-tested so that no seal settings or adjustments are required from the installer. Any springs used to push the seal faces together must be shielded from the fluid to be pumped. The cartridge shall also include a 17-4PH, heat-treated seal sleeve and a stainless steel seal gland.
- I. Automatic Oil Level Monitor:** Shall be located above the mounting plate and be fitted with an internal oil level switch to detect low oil level and shut off the motor in event of low oil level. A relay shall be included for mounting in the motor control panel.
- J. Pump Discharge Pipe:** The pump assembly shall be mounted vertically on a common steel base plate with 8" ANSI CL 150 discharge flange. A 1/4" NPT discharge pressure tap shall be located above the deck plate.
- K. Shaft Coupling:** Shall be T.B. Woods Sureflex elastomeric type with a minimum 1.5 service factor based on the drive rated power, and shall be protected with a guard meeting OSHA requirements.
- L. Motor Stool:** Shall be a fabricated carbon steel weldment machined with piloted fits to positively align the C or B5 flanged motor and pump shaft, with no adjustments.
- M. Pump Base Plate:** Shall be fabricated carbon steel, 3/4" minimum thickness, and shall include lifting lugs.
- N. Stainless Steel Nameplate:** Shall be attached to the pump base plate giving the manufacturer's model and serial number, rated capacity, head, speed, and all pertinent data.
- O. Motor Requirements:** Drive motor shall be ____ HP (KW), ____ RPM, ____ volts, 3 phase, 60(50) hertz, 1.15 service factor, C or B5 flange mounted, TEFC enclosure. The motor shall be sized for non-overloading conditions.
- P. Surface Preparation:** Solvent wash and a single coat of Tnemec 431 epoxy (except motor and stainless steel parts).
- Q. Optional Premium Surface Preparation:** Solvent wash, sandblast, and coat with minimum 30 MDFT Tnemec Perma-Shield PL Series 431 epoxy (except motor and stainless steel parts).