


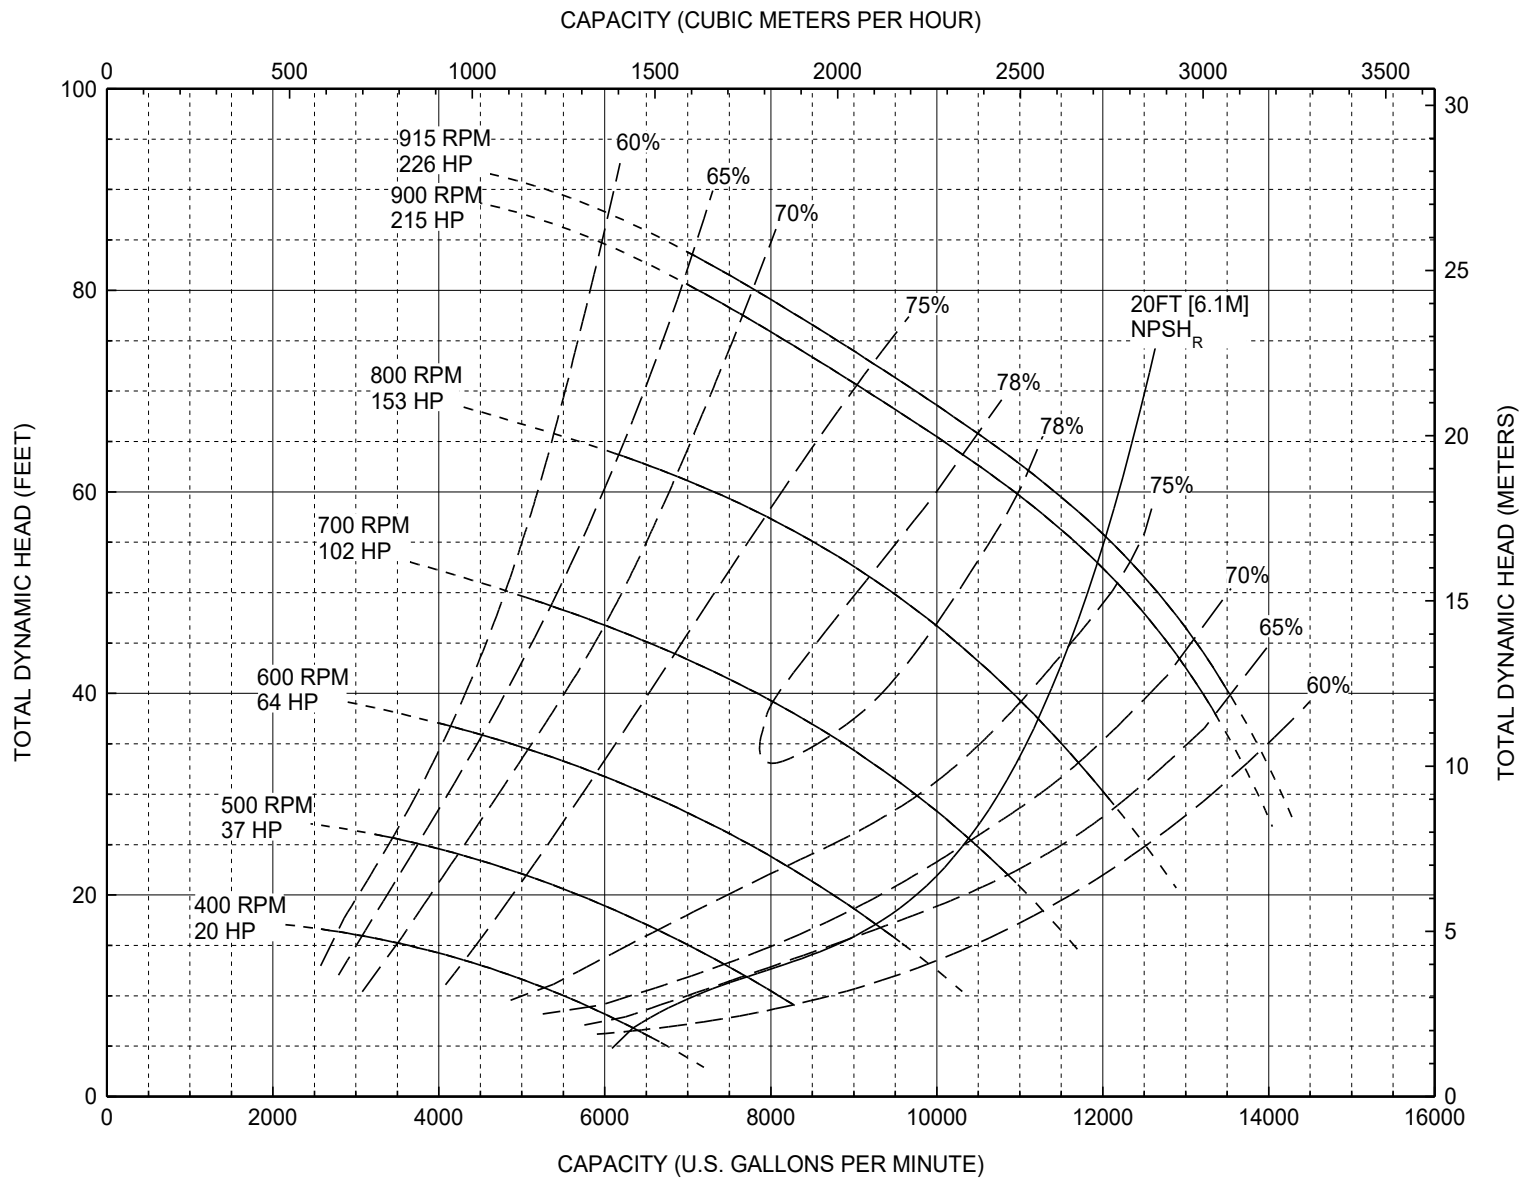

Model:
Portable
THES16W18

Back-Pull-Out Casing
5-Blade Impeller
21.00" Diameter
16" Discharge
18" Suction

Full Trim Variable
Speed Curve

226 continuous HP
req'd at 915 RPM

Minimum continuous
engine speed of
1500rpm required

Visit us on the web at:
www.chopperpumps.com

Unmatched Reliability
Vaughan

 **Chopper**
PERFORMANCE CURVE

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. PUMPS MAY EXCEED HP SHOWN IF OPERATED IN DOTTED PORTION OF CURVE. CURVES ARE SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL A.

Form V856 THES16W18-VS-210 12/25 Rev 1