



Vaughan E Series Chopper Pump PERFORMANCE CURVE


Models:
V3P
V3PR
C3P*
 *max 3' long

3-Blade Impeller
3" Discharge
6" Suction

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	20*	1760	10.30" (262 mm)
B	15	1765	10.00" (254 mm)
C	15	1765	9.50" (241 mm)
D	15	1765	9.00" (229 mm)
E	10	1765	8.50" (216 mm)
F	7.5	1765	8.00" (203 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL B. CURVES ARE BASED ON PREMIUM EFFICIENT TEFC MOTOR SPEEDS. *EXCEEDS 15 HP AFTER 440 GPM.

CAPACITY (CUBIC METERS PER HOUR)

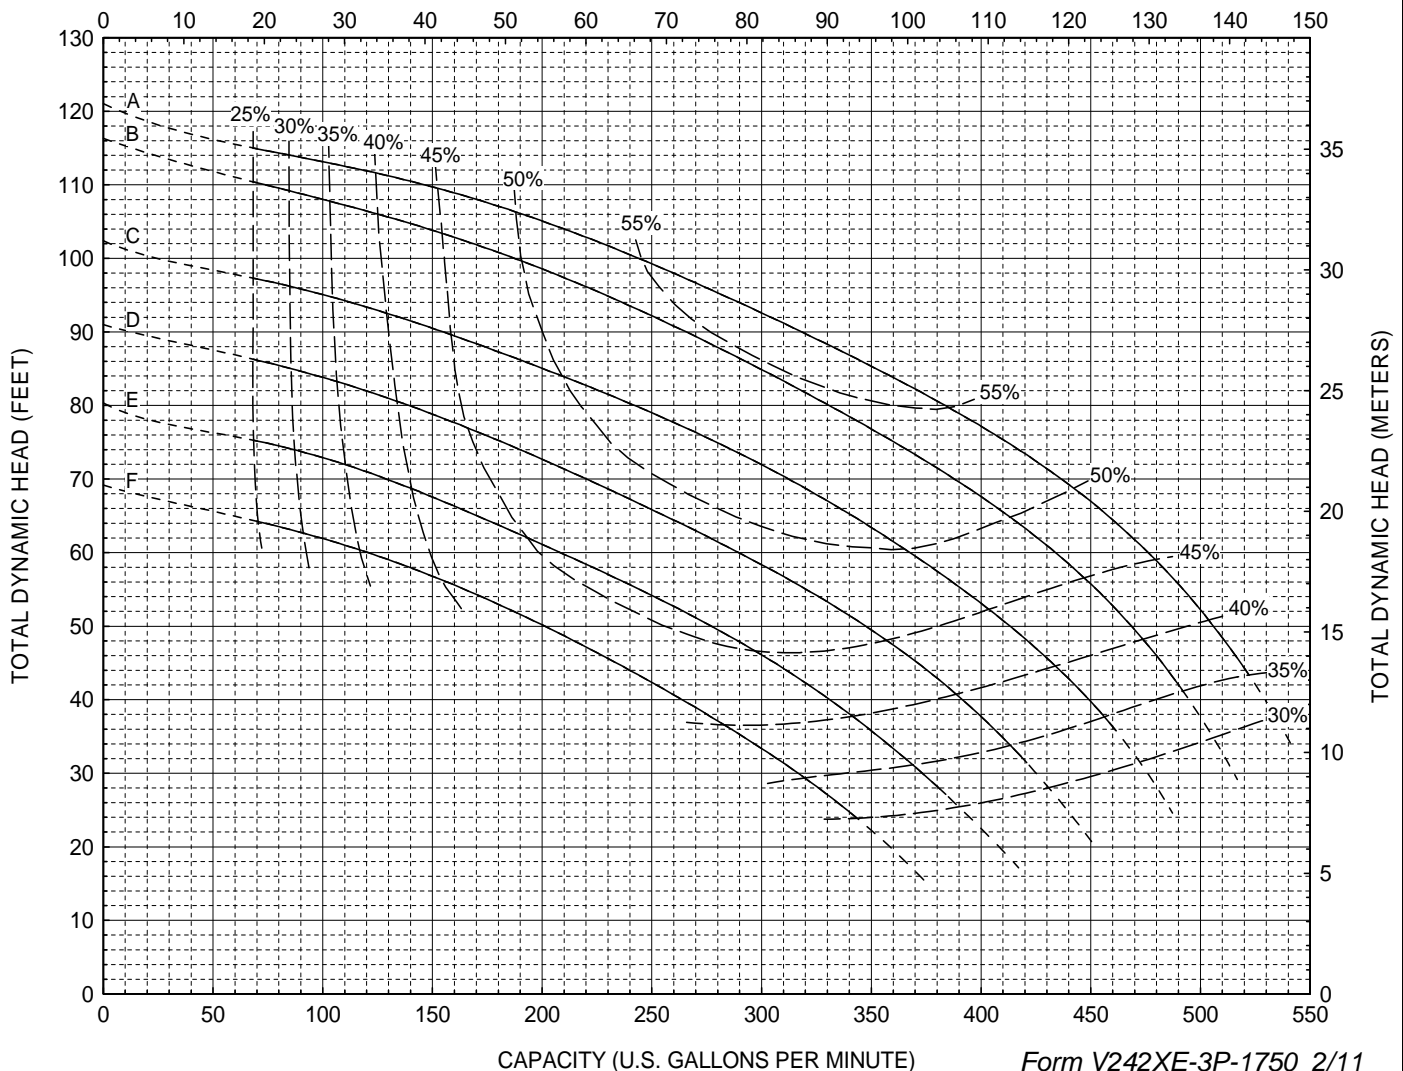

CAPACITY (U.S. GALLONS PER MINUTE)

Form V242XE-3P-1750 2/11