



Vaughan

Vaughan E Series Chopper Pump PERFORMANCE CURVE


Models:
V3V
V3VR

3 Blade Impeller
3" Discharge
Tangential Casing
Variable Speed Curve

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	50	3560	8.00" (203mm)
B	40	3400	8.00" (203mm)
C	30	3100	8.00" (203mm)
D	25	2950	8.00" (203mm)
E	20	2500	8.00" (203mm)
F	15	2300	8.00" (203mm)
G	15	2100	8.00" (203mm)
H	10	1900	8.00" (203mm)
I	7.5	1765	8.00" (203mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B.

CAPACITY (CUBIC METERS PER HOUR)

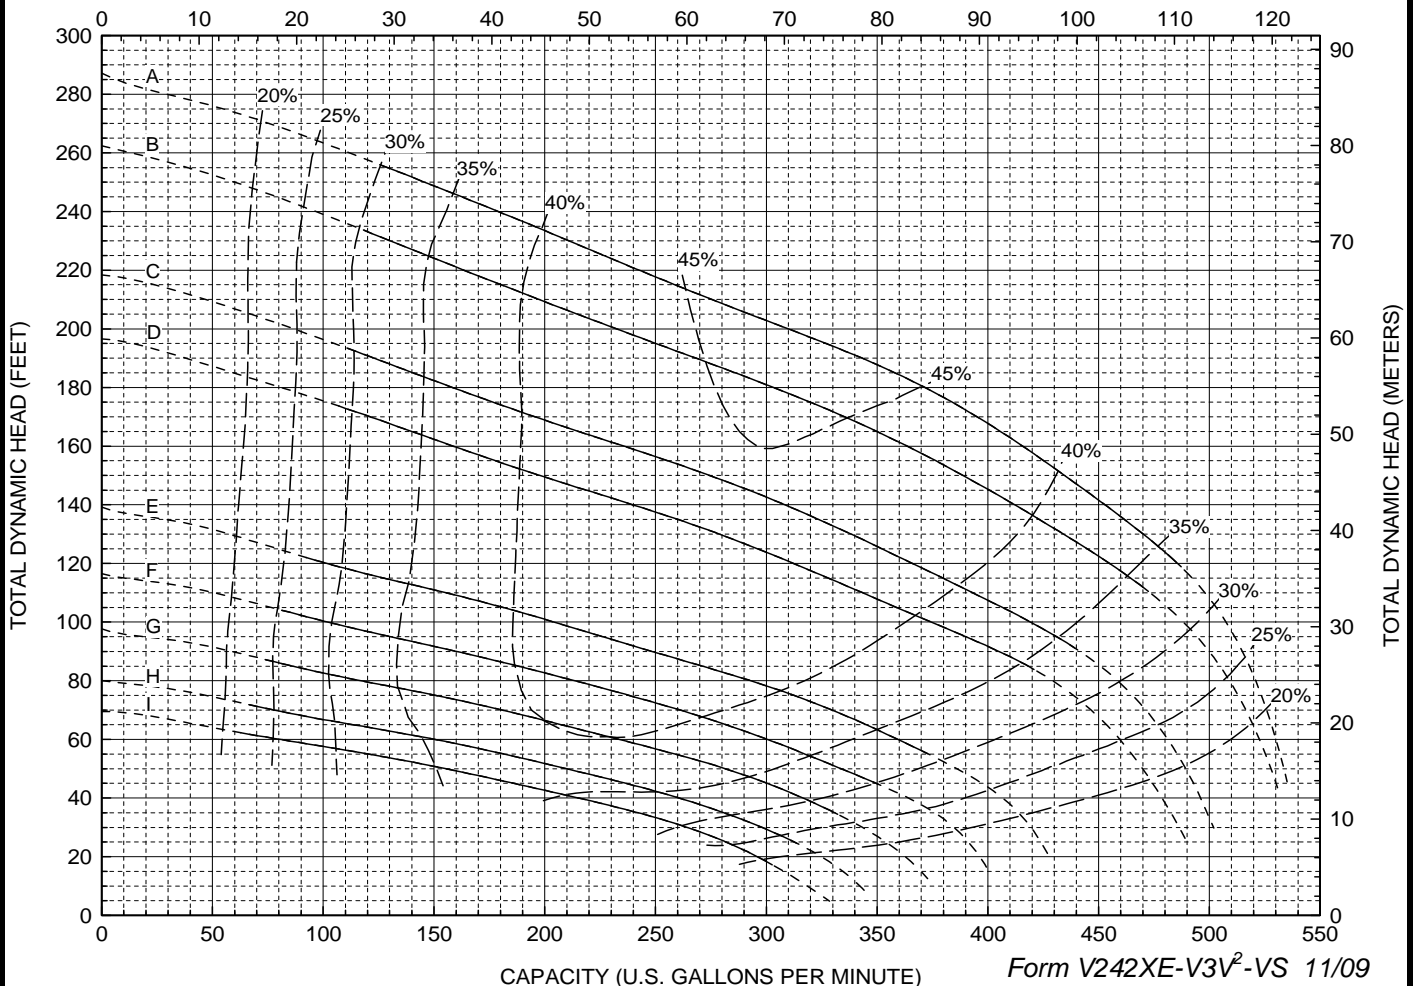

CAPACITY (U.S. GALLONS PER MINUTE)

Form V242XE-V3V²-VS 11/09